

Installation & Wiring Instructions

CT6S/6W/NM3

Emergency Twin Spot


PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING INSTALLATION & LEAVE WITH END USER

Description:

The CT6S/6W/NM3 is a simple solution to your emergency lighting applications. The only connection required is a permanent Live, Neutral and Earth.

Suitable for damp or warehouse applications. The fitting features a factory fitted waterproof gasket to a high ingress protection rating.

The CT6S/6W/NM3 is available as either standard emergency or as DALI self-test. As per the DALI standard, if the DALI version is not connected to a control system, then the fitting will revert to standalone self-test operation. Each head has an output of 3W, providing a total output of 6W.

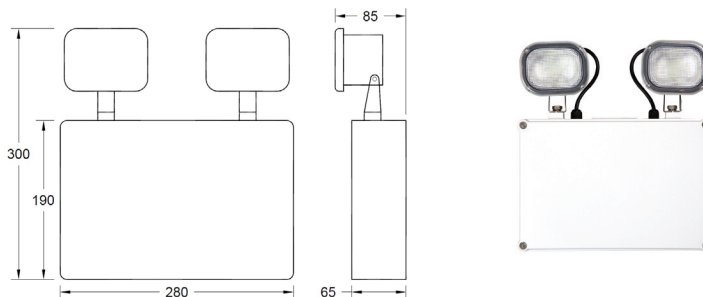

Specification:

Input Voltage	230-240 Volts AC 50/60 Hz
Power Rating Charging *	3.8W 21mA - $\lambda = 0.77$
Power Rating Standby	1.3W 12mA $\lambda = 0.45$
Ambient Temp.	0°C to + 25°C
Mains Input Terminal	0.5mm - 2.5mm
Battery Fuse	Internal to DNA/2
Battery Discharge Current	900mA
Discharge Voltage Limit	5V
Ingress Protection	IP65
Battery Pack	6.4V 3.8Ah LiFePO4
Charge Current	225mA Nominal
Recharge Period	24 Hours
Width and Length	300mm 280mm
Depth	85mm
Side Cable Entry	20mm Knock Outs L&R
Rear Cable Entry	20mm Knock Out Centre
Overall Weight	1.8Kg

* After its initial charge, the CT6S will spend 90% of its operational life in standby mode

Product codes

CT6S/6W/NM3
CT6S/6W/DA

Non-maintained IP65 Bulkhead
Maintained IP65 Bulkhead

Important

It is recommended that this product is installed by a competent person in accordance with the current building and wiring regulations. Liteplan accept no responsibility for injury, damage or loss, which may arise as a result of incorrect installation, operation or maintenance.

The product requires an un-switched supply for charging the battery and a switched supply for maintained operation.

ISOLATE MAINS SUPPLIES AND DISCONNECT THE BATTERY BEFORE INSTALLATION OR MAINTENANCE.

Installation:


1. Remove the two front screws and lift off cover.
2. Open your desired cable entry and feed mains cable through. Use a suitable IP rated gland to ensure that IP rating is maintained.
3. Connect the cables to the terminal block as shown in the diagram overleaf.
4. Do not connect a Switched Live.
5. Connect the battery.
6. Fit the screws back into the cover making a water tight seal.

Installation & Wiring Instructions
 CT6S/6W/NM3
 Emergency Twin Spot



PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING INSTALLATION & LEAVE WITH END USER

Typical Wiring Diagram

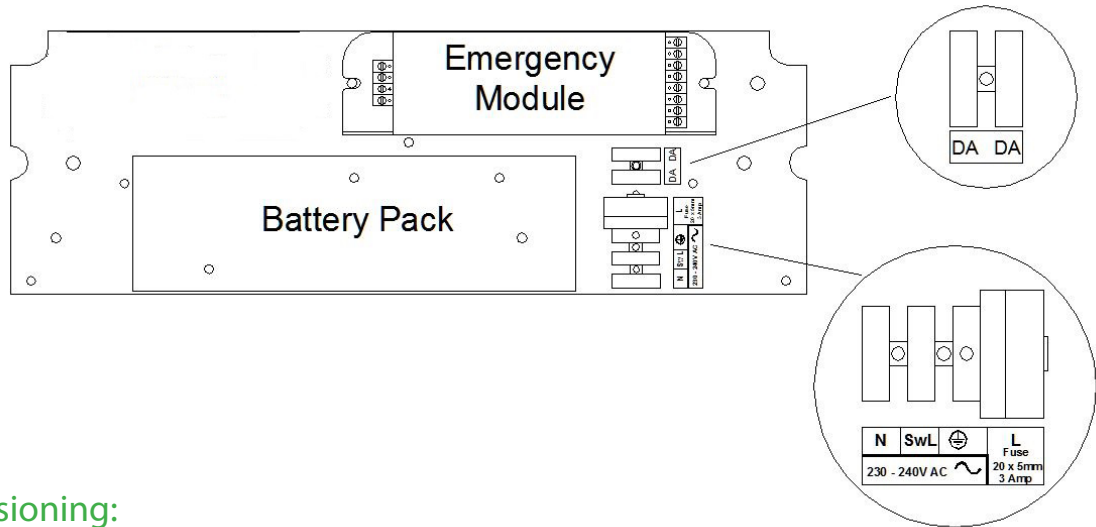

Testing/Commissioning:

- Ensure the power is connected.
- Connect the battery.
- Switch on the Un-switched Supply - Check the Charge LED illuminates.
- Switch off the Un-switched Supply - Check the Charge LED extinguishes and the load LED illuminates.
- Enter the commissioning date on the Battery Pack.
- Switch on the Un-switched Supply

Luminaire Ref/Location			In case of difficulty, contact the Installation Engineers:- Tel:							
Full Recharge Time 24 Hours			Duration 3 Hours				Lamp Type - LED			
ROUTINE TEST RECORD										
	Year 1		Year 2		Year 3		Year 4		Year 5	
Monthly Test	Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
Functional										
Functional										
Functional										
Functional										
Functional										
Functional										
Functional										
Functional										
Functional										
Functional										
Three Hour										

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 0AP. UK

Liteplan reserve the right to change colour, price or specification without prior notice

ISS 030822

